

EMBLEM

Solvent Transfer Film dark 2

EMBLEM Solvent Transfer Film dark 2

Matchcode:	SOTFD2
Material:	transfer film, PU based
Finish:	satin-finished
Color:	white
Weight/Thickness:	100 µm
Liner:	polyester film, 100 µm
Width of roll:	75 cm
Length of roll:	25 meters
BubbleJet Dye:	no
BubbleJet Pigment:	no
Piezo Dye :	no
Piezo Pigment:	no
Piezo Oil:	no
Piezo Eco Solvent:	yes
Piezo Solvent:	yes

Description:

EMBLEM SOTFD2 is a special transfer film for Solvent- and ECOSolvent-inks used for finishing of dark coloured textiles.

The film has to be printed true-sided and can be applied using a manual or pneumatic press. Our test have shown the best results by using a pneumatic press.


SOTFD2 can be used for cotton, cottonblend and syn-

thetics, except polyamide, provided that the used textile is dedicated for the necessary press-temperature.

The transfer film is characterised by brilliant colours, good machine washability and comfortable wearing.

Processing:

1. Before finishing the print has to be completely dry and exhaled. We advise a drying time of minimum 8 hours. A processing in compliance with holding time improves the finishing and the resistance against washing.
2. The SOTFD2 can be cutted direct after printing. Avoid detailed outlines, as they could cause a curl in the film. It is suitable for not to small single letters. Cutting speed ca. 5-10 mm/s, knife pressure ca. 50 g.
3. Seperate the film from the backing.
4. Place the print facing upwards at the textile and cover it with two sheets of a heat proof baking paper.
5. The print has to be transferred according to the transfer instructions you find below.

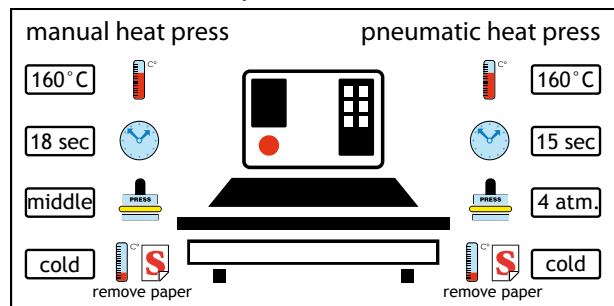

6. The backing has to be removed after the print and the textile have cooled down.

Mashine Wash:

Finished textiles are washable between 40°C and 60°C depending on the used ink.

For washing and ironing the textile has to be turned inside out.

Because of the great number of potential influences at object time and applinace of the above-mentioned materials, on which we have no bearing, test prints have to be effected by the user himself. A legally binding warranty can not be deduced from our specifications. Every liability and warranty that goes beyond the warranty of the product amounting to the product's value as well as entitlements to damages are excluded.